

JA-80G

JA-80G

Jablotron Oasis 80

GPL,

).

Oasis.

230 (-15% +10%), 50 , 2 , II

94 /0,3
1 2, 230 /5

10

90

868 , Oasis

200 ()

-10°C +40 °C, IP30

EN 61779-1,4, EN60335-1, ETSI EN 300220, ETS 3000683

ERC REC 70-03

1 15±3% LEL (0,20%) 10±2% DMV (0,44%)

2 30±3% LEL (0,39%) 17±2% DMV (0,75%)



Jablotron Ltd.
Directive 1999/5/EC


Ja-80G

www.jablotron.com,

NO
NC

(230 /5)

1	1	2
2		

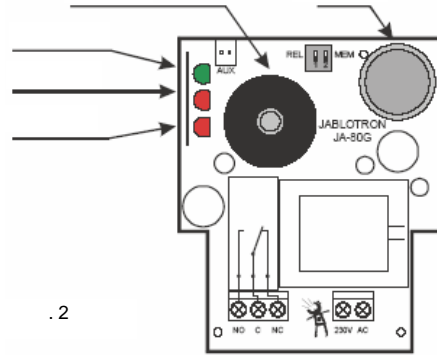


90

1 1
2 2
1

JA-80G

	•	
	•	
1	•	1
2	•	2
2,		

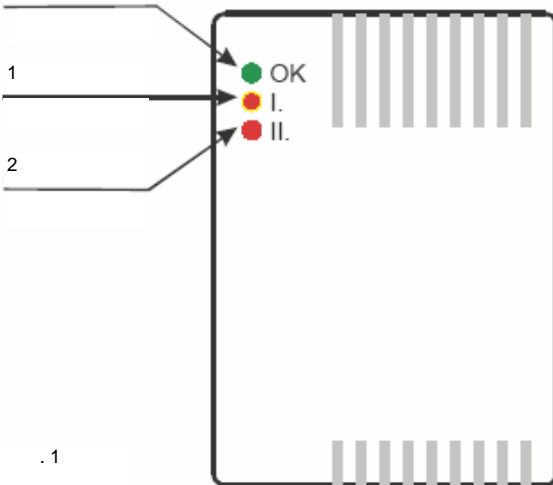

230 V AC.

10)

15

4

Pod Skalkou 33
466 01 Jablonec n.N.
Czech Republic
Tel.: +420 483 559 999
fax: +420 483 559
www.jablotron.com